


## LOADING ON HYDRAGUARD UNDERLAYMENTS

Roofing tiles (6 Max per stack.)

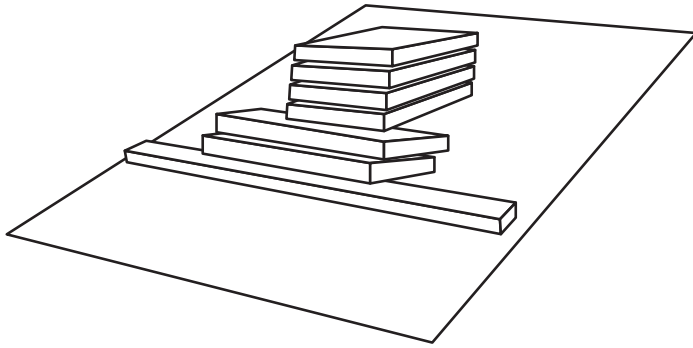


Roof Deck prepared with Hydraguard Underlayments

- It is the contractor's responsibility that all roof covering materials are loaded in a manner as to prevent sliding of materials and prevent displacement from wind during storage on the roof prior to installation.
- For tile applications, Hydraguard recommends the following tile placement when stacking roof tiles on slopes up to 6/12.
- Hydraguard does not recommend stacking more than 6 tiles per stack.
- Tiles shall be stacked as per diagram.
- Two (2) tiles perpendicular to slope and Four (4) tiles placed atop, parallel to slope.
- Batten strips or other appropriate restraint required for all roof coverings on slopes 6/12 and greater.

**Note:** Hydraguard is not responsible for any injuries, losses, or damages resulting from any accidental slippage or from any failure by the contractor to properly load and store any roof covering materials.

## BACK-NAILING RECOMMENDATION

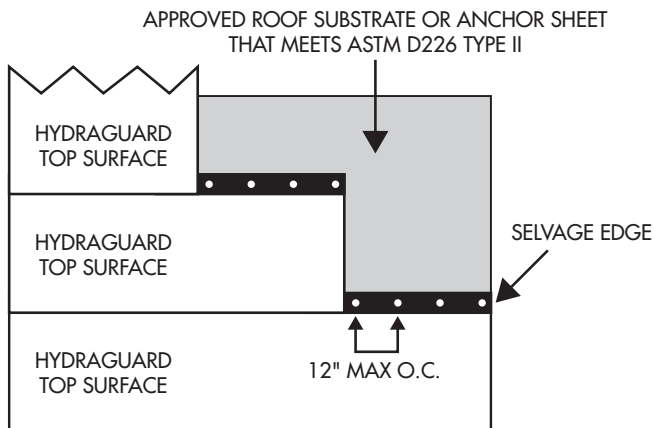

- Hydraguard nailing pattern along top of sheet to be 8" to 12" O.C.
- Refer to local codes or requirements of the AHJ. Codes supersede Hydraguard requirements and recommendations.